



The cGas Carbon Dioxide Detector is a low maintenance, continuous gas monitoring device designed for use in non-explosion rated, commercial HVAC, commercial refrigeration systems, CO₂ enrichment processes and other applications that require the continuous monitoring of CO₂ for life, health and safety. With various low and high sensor ranges and units of measure it offers analog output or digital output, internal relay and audible alarm and 3 alarm levels that are fully programmable in the field. Powered by 24 VDC or ground referenced AC, the CO₂ cGas Detector has an LCD display, temperature compensation and the firmware and configuration can be updated in the field using the USB connection. Pre-calibrated sensors with true Plug & Play Smart Sensor technology makes replacing sensors quick and easy.

The cGas CO₂ Detector comes in a standard water / dust tight, corrosion resistant ABS/ polycarbonate enclosure with a hinged, secured door. With the optional, factory installed splash guard the enclosure is IP54 rated and provides protection in water spray or wash down applications.


KEY FEATURES

- » Long life, infrared Carbon dioxide sensor
- » Smart Sensor replacement at end of life, comes pre-calibrated
- » One linear 4-20 mA or 0-10 V analog output or BACnet® MS/TP RS-485 or Modbus® RTU RS-485 digital output
- » Optional SPDT relay rated 30 volts, 2 amp max
- » Optional internal audible alarm rated 90 dB @10 cm/4 in
- » 24 VDC or VAC power (ground reference)
- » Bright LCD display
- » USB port for configuration updates and firmware upgrades
- » Optional low temperature operation package (Option-LT)
- » Optional RH & Temperature sensor (°C or °F)
- » Optional factory installed splash guard (Option-S)
- » Standard water / dust tight, corrosion resistant enclosure (drip proof)
- » RoHS compliant circuit board

APPLICATIONS


- » Restaurants
- » Fruit Ripening Rooms
- » Greenhouse Plant Production
- » Swimming Pools / Water Sanitation
- » R744 Refrigeration Systems / Walk-in Coolers
- » CO₂ Fire Extinguishing / Suppression Systems
- » Dry Ice Production / Special Effects
- » Antibacterial / Sterilization
- » CO₂ Storage Rooms
- » Chiller / Mechanical Rooms
- » Beverage Bottling Facilities
- » Wineries / Breweries
- » ... and many more

TECHNICAL DRAWING

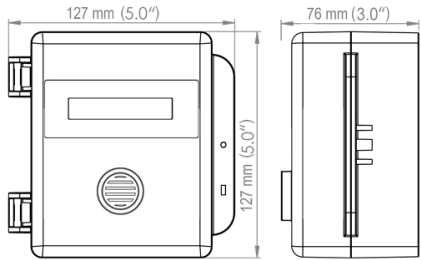


WIRING DIAGRAMS


CGAS-A connected to an FCS Controller (3-wire VDC)

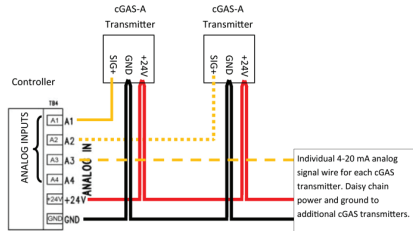

CGAS-D connected to an FCS Controller (4-wire VDC)

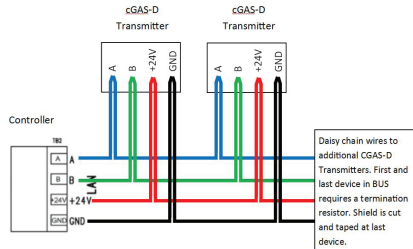

CGAS-D Connected to a BAS/DDC (4-wire VAC)

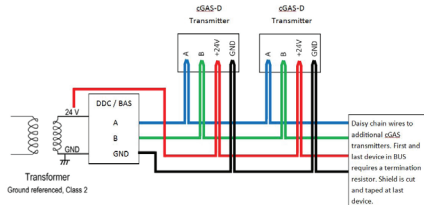

TECHNICAL SPECIFICATIONS

MECHANICAL

Enclosure Black ABS / Polycarbonate, copper coated interior to reduce RF interference, IP54 rated with splash guard installed



ANALOG OR DIGITAL GAS DETECTORS DATASHEET

cGas DETECTOR CO₂ / R744 Transmitter

FIXED SYSTEMS

TECHNICAL SPECIFICATIONS

Weight	400 g / 14 oz
Size	127 x 127 x 76 mm / 5.0 x 5.0 x 3.0 in

USER INTERFACE

Display (standard)	2-line by 16 character graphic LCD Operating Temp: 0°C to 40°C / 32°F to 104°F
Display (low temp) (Option -LT)	2-line by 16 character OLED display Operating Temp: -40°C to 40°C / -40°F to 104°F
Push Buttons	Initiate calibration and menu options with internal UP, DOWN and ENTER push buttons
USB Port	Internal port for USB memory stick for field configuration updates / firmware upgrades

INPUT / OUTPUT

Digital Output (CGAS-D models)	BACnet MS/TP (version 1 rev 14) RS-485 or Modbus RTU (version 1.1b3) RS-485 (user configurable in the field)
Analog Output (CGAS-A models)	One 4-20 mA output or jumper selectable 0-10 or 2-10 volts output
Relay	1 SPDT relay rated 30 volts, 2 amp max
Audible Alarm	Rated 90 dB @ 10 cm / 4 in enable/disable
RH & Temperature	Option -RHT* user selectable units DegC, DegF

ELECTRICAL

Power Requirement	16-30 VDC, 3W, Class 2 12-27 VAC, 50-60 Hz, 3 VA, Class 2
Digital Wiring	VDC or VAC (ground referenced) 4-conductor shielded, 16 AWG stranded within conduit, network wiring (daisy-chain)
Analog Wiring	VAC (ground referenced) 3-conductor shielded 18 AWG (or larger) stranded within conduit
Fuse(s)	Automatic resetting thermal

ENVIRONMENTAL

Operating Temperature	0°C to 40°C (32°F to 104°F) temperatures below 0°C / 32°F requires Option-LT
Operating Humidity	15 - 90% RH non-condensing

CERTIFICATION

Conforms to: CSA-C22.2 No. 205-12, UL508 (Edition 18):2018
Conforms to: EMC Directive 2014/30/EU EN 50270:2015, Type 1, EN61010
Conforms to: FCC. This device complies with Part 15 of the FCC Rules.
Listed by BTL

ANALOG

PRODUCT CODES

DIGITAL

Single Channel Analog Transmitter	Infrared Sensor (Lifespan ~8 yrs)	Single Channel Modbus Transmitter
CGAS-A-CO2-5%	Carbon Dioxide (CO ₂) sensor (0 - 5.0% vol)	CGAS-D-CO2-5%
CGAS-A-CO2-100%	Carbon Dioxide (CO ₂) sensor (0 - 100.0% vol)	CGAS-D-CO2-100%
CGAS-A-CO2-2K	Carbon Dioxide (CO ₂) sensor (0 - 2,000 ppm)	CGAS-D-CO2-2K
CGAS-A-CO2-5K	Carbon Dioxide (CO ₂) sensor (0 - 5,000 ppm)	CGAS-D-CO2-5K
CGAS-A-CO2-10K	Carbon Dioxide (CO ₂) sensor (0 - 10,000 ppm)	CGAS-D-CO2-10K
CGAS-A-CO2-20K	Carbon Dioxide (CO ₂) sensor (0 - 20,000 ppm)	CGAS-D-CO2-20K

OPTIONS (Factory installed)

LT	Low temperature package with OLED display and internal heater for cold environment applications down to -40°C / -40°F
RBZ	1 SPDT dry contact relay rated 30 volts, 2 amps max with internal audible alarm rated 90 dB @ 10 cm / 4 in
RHT*	RH & Temperature sensor (°C or °F)
S	Splash Guard

ACCESSORIES

CET-SGC	Calibration clip for splash guard
CET-715A-CK1	Calibration Kit for 17, 34, 58, 74, 100 L cylinders, 0.5 LPM flow regulator & adapter to fit 17 L cylinder
DUCT KIT 301A	Twin probe assembly for fixed system, two lengths of 1.23 m / 4 ft tubing, adapter plug and dust filter
SCS-8000-RSG	Small, 16 gauge metal protective guard

*NOTE: The analog models have one analog output. If an analog gas model is ordered with Option -RHT, the information is for display purposes only; the one analog output is used for the gas readings



Modbus® is a registered trademark of Gould Inc. Corporation. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE)