



GAS TRACKER2

Plastic gas pipe locator

GAS TRACKER2 is an instrument for locating and identifying buried plastic gas pipes. It is able to locate the position and direction of a buried plastic pipe from the surface. Generally out-dated maps are used to locate existing gas lines. The GAS TRACKER2 was developed to provide an easier, more efficient means to locate pipes resulting in a saving of time and money. Manufactured in France and validated almost one decade ago by the French gas company, it is now used on all continents. This unique signal injection method is internationally patented.




➔ USE PRINCIPLE

The transmitter, thanks to a resonator tank, is connected to a standard meter box. It sends the signal through the gas, vibrating it, which in turn makes vibrations in the surrounding ground. The transmitter is easy to use with only two options : ON and OFF. The GAS TRACKER2 receiver, using a listening device placed on the ground and connected to a hand-held receiver, displays the results. The receiver has two modes : Prelocate, to quickly identify the area where the pipe is buried ; and Pin-point, to accurately locate where the pipe is and which direction it takes. The GAS TRACKER2 is fully operational in urban environments even with the associated ambient noise.

The receiver features :

- A strong design, made for the field
- A military connection
- A long-life battery pack
- A high visibility screen
- A very simple user-friendly interface
- 3 functions : 3 buttons

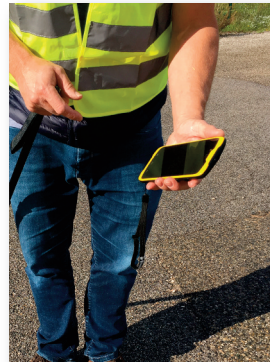

MADE S.A.

167, Impasse de la Garrigue · 83210 La Farlède
Phone : +33 (0) 494 083 198
contact@made-sa.com - www.made-sa.com






In order to improve their equipments, MADE is reserving its rights to modify the products described in that documentation, at any time and without prior notification.

© No part of this work may be reproduced and distributed without MADE's prior written permission.




GAS TRACKER2


TECHNICAL SPECIFICATIONS

TRANSMITTER	RECEIVER	GROUND SENSOR
 <ul style="list-style-type: none"> Battery : Pb 2 x 7,6 Ah 12 V, Battery autonomy 4 h Automotive battery charger input 12 V External power supply (PSU) input 220 V IP 63 	 <ul style="list-style-type: none"> Tablet : Android, Bluetooth connection, Li-Ion rechargeable battery 9.6 Ah, autonomy 8 h, IP66 	 <ul style="list-style-type: none"> Powered by NiMH rechargeable battery Battery autonomy 10 h IP 63 Removable stick
Transport case dimensions : 472 x 347 x 194 mm	Transport case dimensions : 560 x 347 x 239 mm	
Temperature conditions : -20°C à +60°C, 90 % relative humidity		
Weight (approx.) : 13,5 kg	Weight (approx.) : 15,9 kg	


GAS TRACKER 2 SOFTWARE

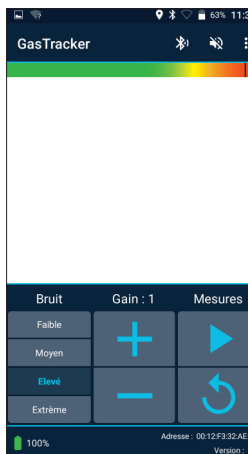


Pre locating

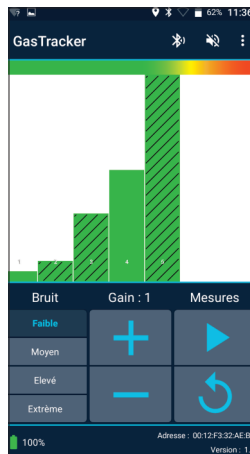

Pinpointing

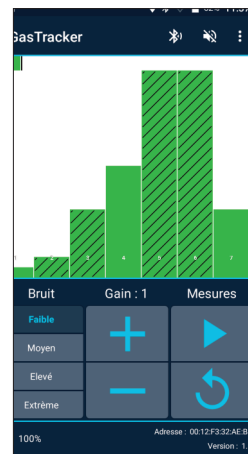

Precision measuring

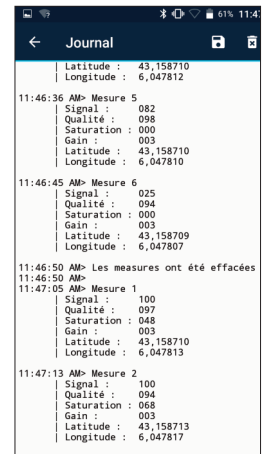

Log File

Ask us for more technicals informations

