



TURKEY  
**ADELIX**

• **PURPOSE**

The frequency range of measurements, wide enough for use in almost any industry, transport, construction and utilities

• **FUNCTIONAL**


Express diagnostics of the vibration state of the equipment according to the RMS value of vibration velocity, vibration acceleration and vibration displacement

• **CONVENIENCE**

Miniature, bright screen Up to 9 hours of battery life. Intuitive control and display of the measurement process and result

# Vibrometers **ADL-M20**

the best solution for operational vibration monitoring

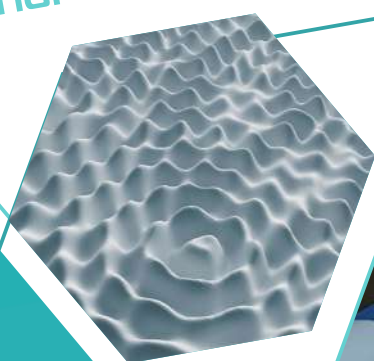

- Measurement of the SCR of vibration velocity, vibration acceleration, vibration displacement
- Measurement of surface temperature
- Data transmission via Bluetooth

**ADL**  
series

# Portable vibrometer **ADL-M20**

## Extend the service life of your equipment

Portable vibrometer **ADL-M20** is designed for rapid diagnostics of the vibration and thermal condition of equipment.

### Scope of application

Portable vibrometers **ADL-M20** are applicable in metallurgy, mechanical engineering, petrochemical, as well as light industry, defense industry, thermal and nuclear power, when servicing equipment of agricultural complexes, housing and communal services, transport, etc.

### Appointment

Operational control of the mechanical condition during operation, diagnostics, maintenance and repair of equipment: bearings, gears, turbines, generators, electric motors, fans, pumps, rotors, distribution units, etc.

The **ADL-M20** allows rapid diagnostics of the vibration state of industrial equipment, measurement of vibration indicators (vibration velocity, vibration displacement, vibration acceleration). It is applicable for monitoring both entire structures and their individual elements.

In addition, the device has the possibility of non-contact temperature detection. No specialized skills and qualifications are required to work with the device. These vibrometers can be used by line personnel without special training.

**The ADL-M20 vibrometer allows you to wirelessly transfer data to mobile devices (Android).**

### Features and benefits

- diagnostics of vibration parameters
- non-contact temperature measurement
- high measurement accuracy
- quick measurement at the touch of a button
- long battery life from the built-in battery
- the measurement process is displayed on a bright display
- no special skills, knowledge and special qualifications of the service personnel are required
- a frequency range of measurements sufficient for use in almost any industry, transport and public utilities

### Technical specifications

Parameter	Value
RMS value of vibration velocity	0,1—100mm/s
RMS value of vibration acceleration	0,1—100 m/s <sup>2</sup>
The scope of vibration displacement	2—2000mkm
Relative error	+5 %
Operating frequency range	10-1200 Hz
Temperature measurement range	from -20 to +200°C
Accuracy of temperature measurement	0,5 °C
Display type	OLED, 0.96"
Display Size	128x64 mm
Li-ion battery	3.7V, 600 mAh

Parameter	Value
Connector	microUSB
Compatibility	Android, iOS
Wireless communication module Bluetooth Low Energy (BLE)	Up to 10m
Continuous operation time	8 hours
Environmental conditions	
- temperature	0–40°C
- relative humidity	< 85 %
Degree of protection	IP54
Overall dimensions	170x36x20 mm
Weight	100 g



#### **Adelix Turkey**

Mehmet Akif Ersoy,  
Mahallesi 286. Cad. No: 6/60  
Yenimahalle/Ankara

**+90 534 790 18 72**

**+90 312 354 33 87**

[www.adelixturkiye.com](http://www.adelixturkiye.com)

[info@adelixturkiye.com](mailto:info@adelixturkiye.com)